



TOP VIEW

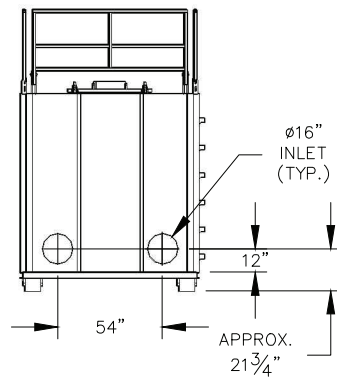

END VIEW

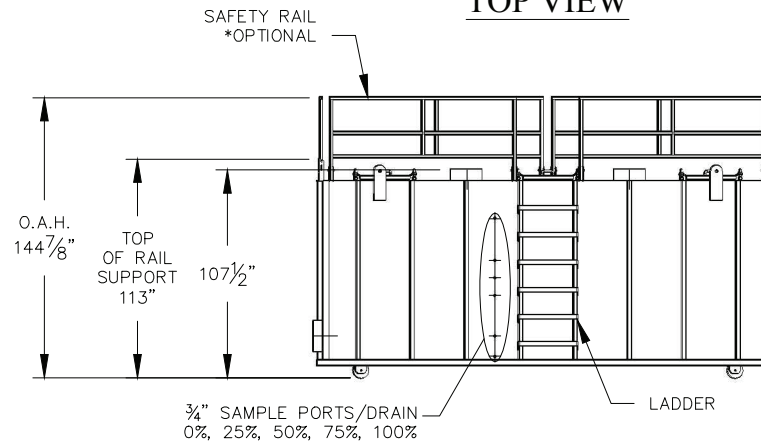

FRONT VIEW

VESSEL STANDARDS

VESSEL MATERIALS : SA-36	LIQUID DRAIN ASSEMBLY : 3/4" NPT
LINING : EPOXY	VOLUME OF MEDIA BED : 440 FT ³
EXTERIOR PAINT : EPOXY BASE W/ URETHANE TOP COAT	SHIP WT. EMPTY : 12,000 LBS
INTERNALS : 304 STAINLESS STEEL POR-O-SEPTA	MAX. OPERATING PRESSURE : 1 PSI
VESSEL ACCESS : 42" x 24" ACCESS HATCH (3 PLCS.)	MAX. OPERATING TEMPERATURE : 180°

2	REVISED FOR 42" x 24" VESSEL ACCESS	JB	12/22/14
1	REVISED FOR TIGG FABRICATION STANDARDS	JB	1/21/13
NO.	REVISION	BY	DATE
PROJECT			
NB-12			
PROJ. NO. SALES			
P.O. NO.			
THIS DRAWING AND DESIGN ARE THE PROPERTY OF TIGG CORP. AND SHALL NOT BE REPRODUCED IN WHOLE OR IN PART, NOR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIALLY PERMITTED IN WRITING BY TIGG CORP. THIS DRAWING LOANED SUBJECT TO RETURN ON DEMAND.			
DRAWN BY	JB		
DESIGN BY	BB		
CHKD. BY	BB		
DATE	10/13/08		
SCALE	NTS	DWG. NO. NB-12-1001	
			REV. 2

NB-12
PLAN & ELEVATION